

FRONT LINKAGE

FS-4



- parkable or permanently attached front linkage for tractors up to 190 HP, lifting power 2.800 kg or 4.800 kg
- mounting brackets combinable with coupling plate for snow ploughs
- external linkage control combinable with ELC ergo, push buttons mounted on the front linkage
- optional front PTO for many tractor types available

FRONT LINKAGE

FSK-18



- for tractors up to 70 HP, lifting power 1.800 kg
- permanently attached front linkage
- external linkage control combinable with ELC ergo, push buttons mounted on the front linkage
- optional front PTO for many tractor types available

ACCESSORIES

BDR 1.4



- ground pressure control for optimum weight distribution of front mounted equipment and front axle of the vehicle
- continuously adjustable relief of load over potentiometer, memory for up to 5 devices
- optimum traction and protection of the soil while mowing, loosening soil and snow clearing

MOUNTING VARIANTS

SNOW PLOUGHS



- coupling plate EURO Gr. 3 / 5, orig. Hauer, VSS-A, VSS-B
- 3-point attachment
- communal linkage triangle
- mounting frame for various wheel and telescopic loaders
- special designs

SNOW BLADE

DRS-M



- perfect for clearing sidewalks and narrow paths
- for small tractors and municipal vehicles
- blade height: 680 mm, widths: 1200 – 2000 mm

SNOW BLADE

HS



- perfect for clearing access roads, paths, parking lots
- blade height center/outside: 750/850 mm, widths: 2000 – 3000 mm

SNOW PLOUGH

SRS-L



- lightweight snow plough, ideal for professional clearing on lower snow conditions
- SRS-2 L two blades or SRS-3 L three blades
- blade height center/outside: 850/1000 mm, widths: 2400 – 3200 mm

SNOW PLOUGH

SRS



- perfect on higher snow conditions for challenging professional snow clearing
- SRS-2 two blades or SRS-3 three blades
- blade height center/outside: SRS-2 1050/1220 mm, SRS-3 1200/1400, widths: 2800 – 3600 mm

SNOW PLOUGH

VARIO VS-L



- ideal for clearing crossroads, roads with driveways, squares and parking lots
- variable adjustable snow plough with two blades
- blade height center/outside: 890/1000 mm, widths: 2400 – 3200 mm

SPREADER

TS-2



- capacity 1 m³ / 1,5 m³
- spreading width 1 – 8 m
- compact, close mounting to the tractor for optimum weight distribution
- container zinc coated and painted, spreader disk and guide plate from stainless steel V4A

SCRAPER

HP-2461



- rear leveling scraper for preparation and maintaining of paths in agriculture, forestry and municipality
- extreme stable and solid design for heaviest tasks
- hydraulically adjustable for different tasks: lateral, horizontal and swing out adjustment, hydraulic support wheel optional
- blade height: 2.400 mm, blade with: 610 mm
- optional widenings and guiding plates inclined/straight available
- control options: electromagnetic change-over valves on scraper, also with joystick control available, oil supply over PTO shaft pump and oil tank mounted on the scraper



PRODUCT
OVERVIEW

INNOVATION WITH TRADITION FOR LIFE.

FRONT LOADER XB BIONIC

- professional front loader for tractors from 120 up to 280 HP
- especially for large tractors optimized bracket system "TBS-HV" with automatic locking
- tilting cylinders and mechanical parallel guidance with X-Kinematic integrated in the cavity of the loader arm
- comfortable loading with considerably expanded field of vision and ergonomically placed operating elements



- stable loader arm with double-walled cross beam - suitable for the toughest operating conditions
- hydraulic component group "MCV" protected inside the cross beam, up to 3 additional hydraulic functions available
- extensive range of implements and accessories, from load hook to electro proportional control unit



FRONT LOADER POM-VX



- professional front loader for tractors from 50 up to 120 HP
- mechanical parallel guidance
- robust stabilizer loader arm for particularly high resistance
- hydraulic lines mounted on the bottom of the loader arm, additionally protected by covers
- protected hydraulic component group "MCV", additional up to 3 hydraulic functions
- proven bracket system „TBS“, optional with automatic locking "K-II" or Oberrahmen-System
- extensive range of implements and accessories, from load hook to electro proportional control unit



FRONT LOADER POM-R




- lightweight all-round front loader for tractors from 40 up to 110 HP
- mechanical parallel guidance
- stable loader arm profile
- hydraulic component system expandable up to two additional hydraulic functions
- hydraulic lines protected on the bottom of the loader arm
- proven bracket system „TBS“, optional with eccentric bolt locking or Oberrahmen-System



IMPLEMENTS AND ACCESSORIES



shovels
earth shovel, light material shovel, large volume shovel, high tipping shovel, silage gripper shovel, multi gripper shovel, forest gripper shovel, ...

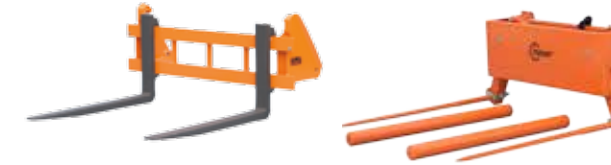

pallet devices & forks
Pallet fork in different versions, large bale fork, round bale handler, manure fork, silage gripper fork, ...



gripper
different silage bale grippers, timber grapple with rotator, ...



IMPLEMENTS AND ACCESSORIES



control units
mechanical single lever control unit, electro proportional single lever control unit ELC ergo



special implements
working platform, load hook, hydraulic rotating mechanism, implement adapters, adapters for wheel and telescopic loaders, 3-point adapter, ...



counter weights
front and rear counter weights from 650 up to 2.500 kg



© Hauer 1/2016. Images shown may differ from standard delivery. Errors excepted and technical changes reserved.



Franz Hauer GmbH & CoKG
A-3125 Statzendorf, Werksstraße 6
Tel.: +43 / (0)2786 / 7104-0, Fax: +43 / (0)2786 / 7104-15
e-mail: info@hfl.co.at; Internet: www.hfl.co.at